



Lenovo ThinkPad T400s CMOS Battery Replacement

Replacing the CMOS battery for the Lenovo ThinkPad T400s.

Written By: Morgan Montalvo



INTRODUCTION

This guide will show you how to replace your CMOS battery.



TOOLS:

- [Metal Spudger](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Keyboard




- Remove the Phillips #0-6mm screw.
- Lift up the back cover to the RAM cards.

Step 2



- Pull the lock for the battery to the left to unlock.
- While holding the tab in the unlocked position, remove the battery.

Step 3

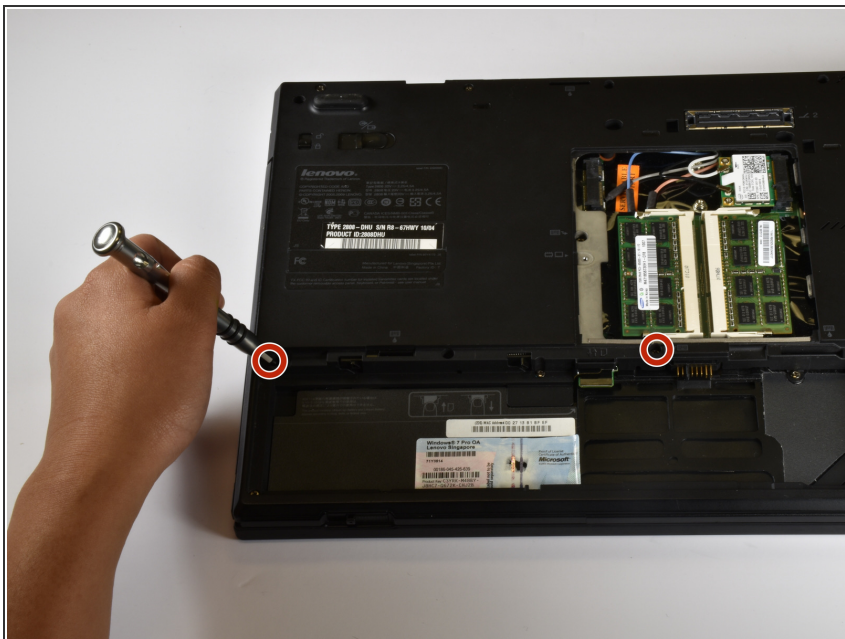


- Remove the two Phillips #0-6mm screws on the back panel.
- ⓘ These screws are marked with a keyboard symbol next to them.

Step 4



- Turn the computer over and open the lid.
- Wedge the small metal spudger between the palm rest and the keyboard.

Step 5

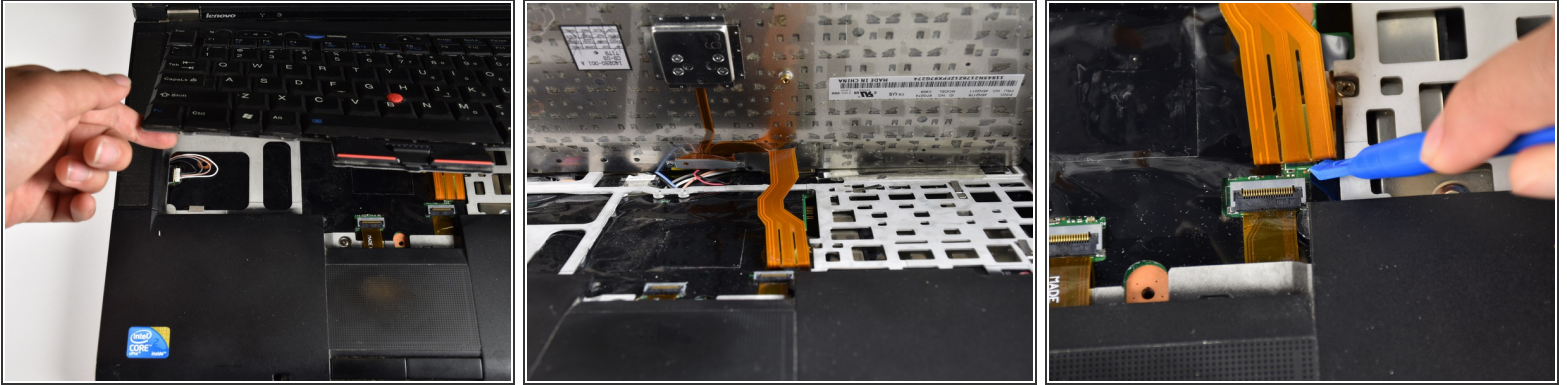



- Lift up the keyboard, but be careful not to completely remove.
- ⚠ Don't lift the keyboard too quickly, there is a connector cable you must disconnect first.
- Wedge the small plastic opening tool underneath copper band and tilt back.
- Remove keyboard to replace.

Step 6 — CMOS Battery



- Gently pull the back-up battery from underneath the front panel.

Step 7

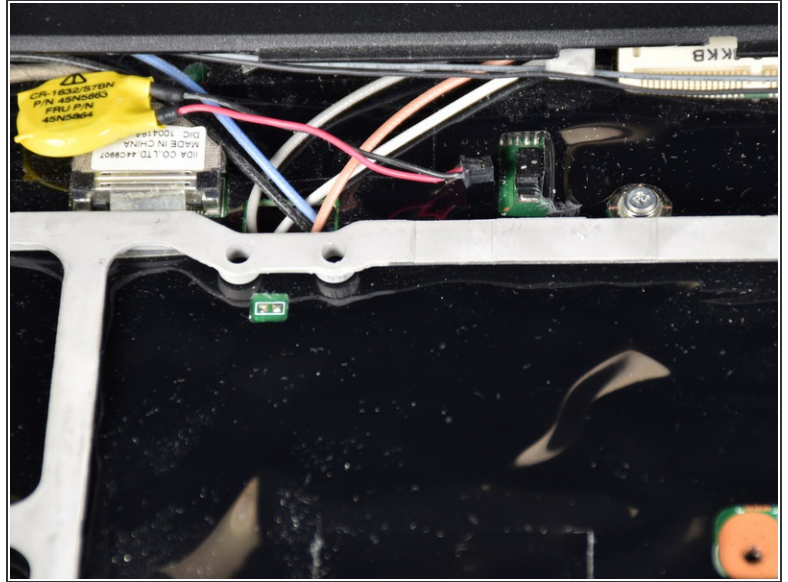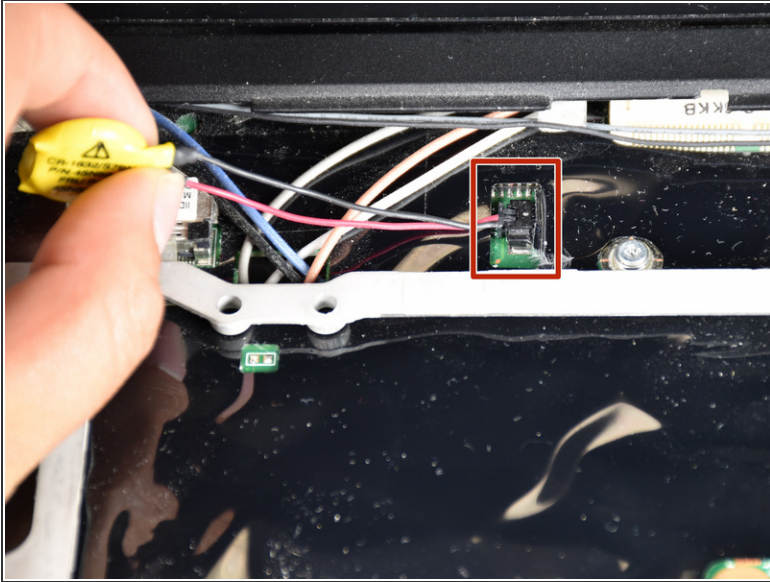

- Pull on the black connection piece and remove the back-up battery.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 04:45:05 PM.